





WE SEE WHAT YOU NEED

HBB-75LD

High Precision Blackbody

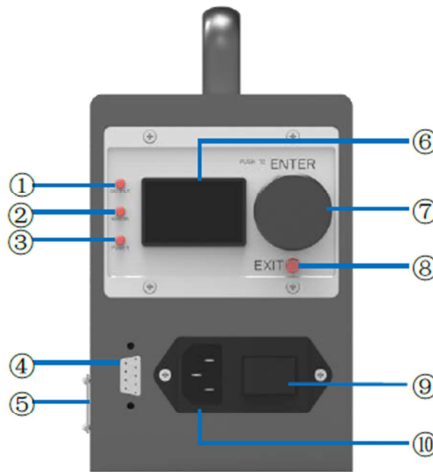

- 1 – Status indicator
- 2 – Fault Indicator
- 3 – Power Indicator
- 4 – Debug Maintenance port
- 5 – Product nameplate
- 6 – LCD Display
- 7 – Single Key Shuttle
- 8 – Exit key
- 9 – Power Switch
- 10 – 220V power Socket

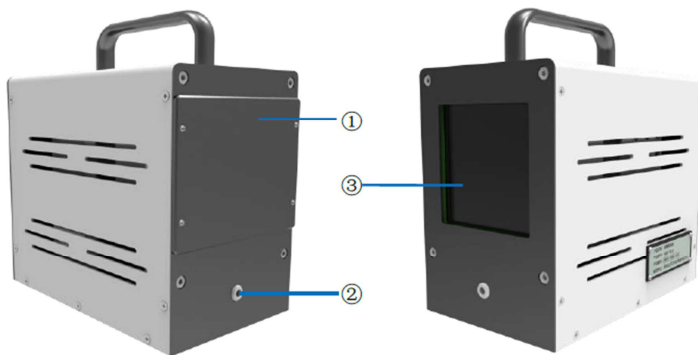

- 1 – Blackbody Source Protection Cover
- 2 – Blackbody Work Indicator
- 3 – Blackbody radiation Source

Type	HBB-75LD
Focal Plane	75mmx75mm
Temperature Range	From 20° to 50°C
Controlled Precision	+/- 0.1°C
Speed of temp. rise and fall	8+C/min
Power Supply	220VAC 50Hz
Average power consumption	60W
Dimensions (LxWxH) in millimeters	198x113x196 (w/ handle) 198x113x160 (net height)
Weight	3.8Kg
Debug Port	D9