


Feature

- H.264 dual-stream video compression
- Compatible with Analog 960H/D1
- All channel 720P@25/30FPS realtime recording, 1/4CH playback simultaneously
- 2*USB2.0, USB Disk up to 32G(Kingston)
- Audio talk back supported
- Support 10M/100Mbit/s network interface
- Mobile surveillance supported,Including iPhone, iPad, Android
- Support browser IE 6.0 Above;
- Free ISS Management software
- Free DDNS server: HDCCTVDDNS
- 1080P HD Diaplay
- 1HDD* Max 2TB per HDD

Dimensions

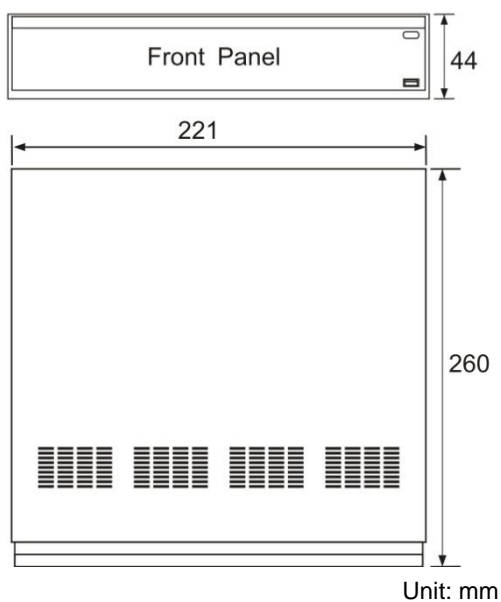

Technical Specifications

Model NO.	QH-D6008CM
OPERATION SYSTEM	LINUX
VIDEO	
VIDEO SYSTEM	NTSC/PAL Switch Selectable
INPUT	BNC*8,1.0Vp-p,75ohm
CVBS OUTPUT	NTSC:720*480
HDMI OUTPUT	1 HDMI Output
VGA OUTPUT	1 VGA Output
AUDIO	
INPUT	4CH, RCA
OUTPUT	1CH, RCA
TALK BACK	YES
CONTROL	
MOUSE	2*USB2.0
IR CONTROLLER	YES
STORAGE	
BUILD IN INTERFACE	SATA 2.6 *(1*(HDD 4TB)
DISPLAY	
DIVISION	1, 4, 9
ZOOM	Preview&Playback Zoom Support
RECORDING	
COMPRESSION	H.264(High profile)
RECORDING MODE	Manual/Schedule/Motion Detection/Sensor (Optional)
RESOLUTION	Mode 1: 8CH 720P
	Mode 2: 4CH 720P + 4CH 960H
	Mode 3: 8CH 960H
RECORD FRAME RATE	8CH 720P@20fps,
QUALITY	Worst, Worse, Bad, Normal, Better, Best
PLAYBACK	
SYNC PLAYBACK	1, 4
SPEED	Normal, FF(1X, 2X, 4X, 8X,), Slow (1/2X, 1/4X, 1/8X)
SEARCH METHOD	Time, Event, Channels and Calendar
COMMUNICATION	
REMOTE ACCESS	IE (10.0 and below), ISS (Windows XP/WIN7/WIN8), ISS MOBILE2 (IOS, Android)
REMOTE OPERATION	Remote view, remote playback, remote setup
NETWORK SERVICE	TCP/IP、PPPOE 、 DDNS、 FTP、 NTP UPNP
MOBILE DEVICE	Iphone, Ipad, Android
3G EXTERNAL MODULE	Yes, with USB 2.0 Port
WAN RJ45	10/100Mbit/s
WIFI EXTERNAL MODULE	Yes, with USB 2.0 Port, 100Meters
GUI INTERFACE	Supported GUI 16 Bit True Color
PTZ PROTOCOL	PELCO-D, PELCO-P, etc 17 kinds of protocol
BACKUP	
EXTERNAL	2*USB2.0
NETWORK	YES
FILE FORMAT	AVI
GENERAL	
RS-485	1
RS-232	NA
UNIT DIMENSION(mm)	260(L) x 44(H) x 221(W)
OPERATION TEMPERATURE	10°~40°
WORKING HUMIDITY	10% ~ 90%
POWER CONSUMPTION	DC 12V,2A, <6W (Exclude HDD)