

3.0 AHD/CVI/TVI/Analog 4- In-1 tester



Overview

The new 4.3inch HD coaxial tester is developed for the on-site installation and maintenance of HD coaxial camera, like TVI,CVI, AHD, and Analog. It also provides many useful functions, such as video display, PTZ control, DC12V output power, audio test, image generator, RS485 data searching, cable testing, LED lamp etc.

Specifications


Specifications	
Model	TI-ACT9537W
Video Test	
Signal mode	NTSC/PAL (Auto adapt)
LCD Screen	4.3 inch VGA TFT-LCD, 480x272resolution
LCD adjustment	Brightness, Contrast, Saturation adjustable
Video IN/OUT	1 channel BNC Input
PTZ Controller	
Communication	Support RS485
PTZ Protocol	Compatible with protocols PELCO-D/P
Baud Rate	1200, 2400, 4800, 9600, 14400bps
Video Signal Generation	
Color bar generator	Support both PAL / NTSC format's standard color bar output
	(Red, Green, Blue, White, Black, Grey) and testing image output
UTP Cable Tester	
UTP cable test	Display UTP cable connection status , cable type and the
	sequence of wires as well as read the number of the test box.
DC12V 1A Power Outpo	ut
DC12V power output	Output DC12V1A power for camera
Audio	·
Audio input test	1 channel audio signal input

TI-ACT9537W



TVI Test	
TVI video signal test	1 channel TVI input(BNC interface), support TVI
	@720P25/30/50/60,1080P3MP/4MP/ 5MP@25/30
CVI Test	
CVI video signal test	1 channel CVI input(BNC interface), support CVI
	720P@25/30/50/60,1080P@25/30,3MP and 4MP@12.5/20
AHD Test	
AHD video signal test	1 channel AHD input (BNC interface), support AHD
	720P@25/30/50/60,1080P/3MP/4M/5MP@25/30
POWER	
Power Adapter	DC 5V (1.5A)
Battery	Built-in 3.7V 2600mA
Rechargeable	After charging 3-4 hour, working time lasts 6-8 hours
Low Consumption	Energy saving , battery capacity indicator
Language	
Language	English and Chinese optional
General	
Working Temperature	-10℃ ~ +50℃
Working Humidity	30% ~ 90%
Dimension/ Weight	120mm x82mm x 40mm / 150g

Interfaces

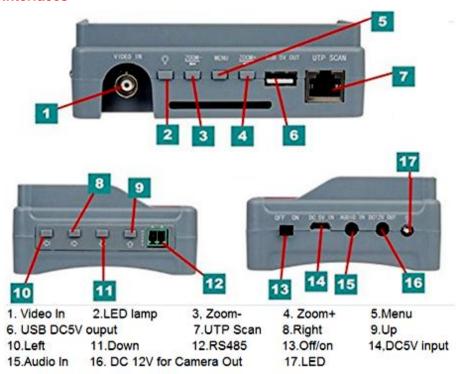

TI-ACT9537W



Package List

- 1x Portable CCTV Camera Tester
- 1x Built-in 2600mAh Lithium Battery
- 1x 5V 1A Adapter
- 1x Wrist Strap
- 1x Micro USB Cable
- 1x A/V Cable
- 1x Power Output Cable
- 1x Manual