

Color CCD Camera





Features

- Supports Video / DC Drive Lens
- Supports DC or AC voltage

Standard Type



(550 TVL)

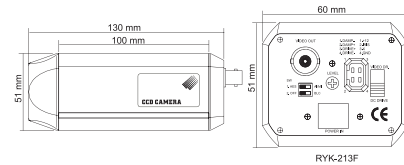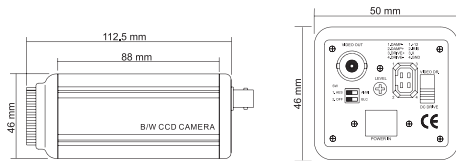

Camera option

- RYK-277F : 1/4" CL CAMERA, 330TVL, DC (AC:RYK-477F)
 RYK-575F : 1/3" BW CAMERA, 420TVL, DC (AC:RYK-775F)
 RYK-577F : 1/3" BW CAMERA, 600TVL, DC (AC:RYK-777F)

Model No.	DC	RYK-275F	RYK-272F	RYK-213F
	AC	RYK-475F	RYK-472F	RYK-413F
Image Device	1/3" Color Sony Super HAD		1/3" Color Sony Super HAD (Hi-Res.)	1/3" Color Sony Super HAD (Hi-Res.)
Picture Elements	NTSC:510x492, PAL:500x582		NTSC:768x494, PAL:752x582	NTSC:768x494, PAL:752x582
Resolution	380 TVL		470 TVL	550 TVL
Min. Illumination	0.1 Lux / F1.2		0.2 Lux / F1.2	0.2 Lux / F1.2
S/N Ratio	More than 48dB			
Electronic Shutter	EIA:1/60~1/100,000, CCIR:1/50~1/110,000			
Gamma	0.45			
Iris Control	Video / DC Drive			
Lens Mount	C / CS			
White Balance	Auto			
Gain Control	Auto			
Back Light Comp.	On / Off			
Sync. System	Internal			
Video Output	1 Vp-p / 75 Ohms			
Audio Output	2 Vp-p / 50 Ohms (option, for DC type only)			
Power Supply	DC12V±10%			
	AC24V, AC110V, AC100~240V, DC12V/AC24V Dual (option)			
Power	225mA max.	125mA max.	175mA max.	
Consumption	3.2W max.	2.5W max.	3.2W max.	
Operating Temp.	-10°C ~ 50°C			